


High Pressure Trailer Details: 123 MCF CNG Trailer - 20'

Equipment Type	High Pressure Gas Trailer
Model	20ft Enclosed Trailer
Gas Capacity	123,000 SCF / 123 MCF
Useable Capacity	104,550 SCF / 104 MCF (85% of the total volume)
Max Pressure	3,250 PSI
Fill Rate	At Compression Rate: @2,000 SCFM (1 Hour) @5,000 SCFM (25 minutes)
Purchase Price	Contact For Purchase Price

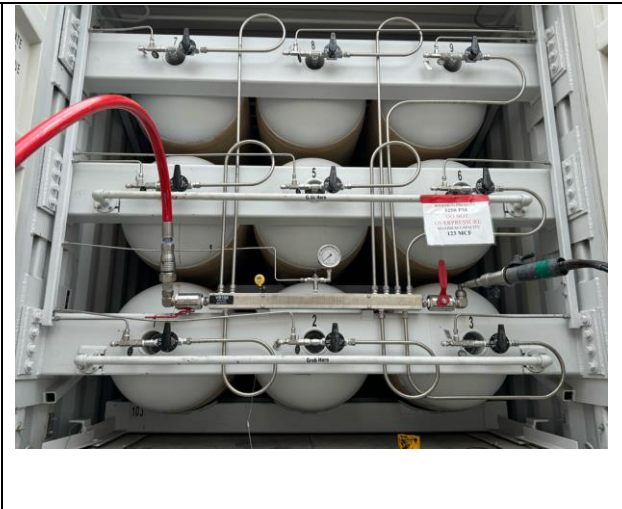

Technical Data:

Dimensions	19' 10 1/2" x 8' x 8.5'
Weight	Empty 36,500 lb / 16,600 kg Full 42,133 lb / 42,133 kg
Fueling	Rear
Connections	1" FNPT with a 1" plugged FNPT option for a second connection point
Cylinder	Type 2 steel cylinders, hoop-wrapped with resin-infused fiberglass.
Water Volume	12,615 L / 3,332 G
Axles	2 Axles

Efficient:



With a gas capacity of **123,000 SCF / 123 MCF** and a maximum operating pressure of **3,250 PSI**, the **20ft Enclosed Trailer** ensures optimized and cost-effective gas delivery for various industrial applications. Its capability to deliver a flow rate of up to **5,000 SCF** in just **25 minutes** enhances operational efficiency.

Modular:

Designed for versatile deployment, the **20ft Enclosed Trailer** is ideal for remote locations and areas without pipeline infrastructure. It features **9 Type 2 steel cylinders**, rear fueling, and a second connection point option, allowing customization to meet various operational demands in both emergency and non-emergency situations.

Safe:

Built to **US DOT SP 14867** standards, this trailer ensures reliable and secure gas transport. With a **1" FNPT** connection and an additional **1" plugged FNPT** option, it provides both safety and flexibility for gas filling and discharge operations.

Additional Pictures:



For more information on current availability, sales price and rental rates please contact our office at 1-800-909-4403 or send inquiry at info@cngdelivery.com